


BUTTERFLY VALVE



- END CONNECTOR: FLANGE
- WORKING PRESSURE: 200PSI

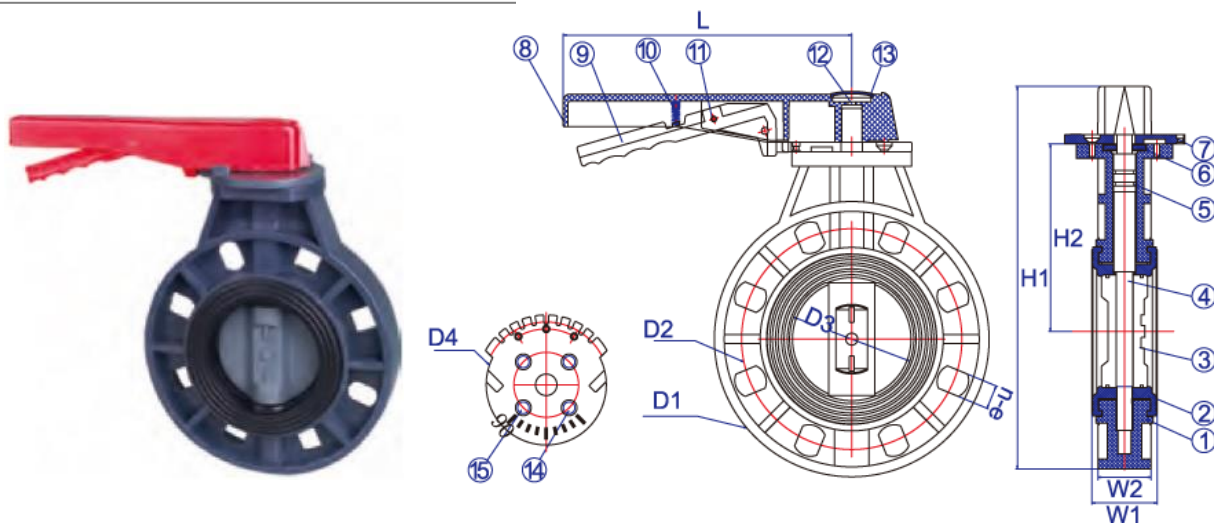

COMPONENT PARTS

ITEM	PARTS	MATERIAL	QTY
1	Body	PVC	1
2	Seat Seal	EPDM, FPM(NBR)	1
3	Gate	PVC	1
4	Stem	SUS410	1
5	O-Ring	EPDM, FPM(NBR)	2
6	Washer	ABS	1
7	Locking Plate	PVC	1
8	Large Handle	ABS	1

COMPONENT PARTS

ITEM	PARTS	MATERIAL	QTY
9	Small Handle	ABS	1
10	Spring	SUS304	1
11	Pin	SUS304	1
12	Bolt	SUS304	1
13	Handle Cap	ABS	1
14	Inserted Bolt	SUS304	4
15	Bolt Cap	PVC	4

DIMENSIONS

SKU	D1 (mm)	DIN D2(mm)	JIS D2(mm)	ANSI D2(mm)	D3 (mm)	D4 (mm)	L (mm)	H1 (mm)	H2 (mm)	W1 (mm)	W2 (mm)	DIN n-Øe	JIS n-Øe	ANSI n-Øe	WEIGHT (kg)	PCS/ CTN
BTFVAWE050	160.1	120.0	100	120.4	55.6	99.7	189.7	223.3	98.3	44.0	32.0	4-20	4-19	4-19	1.125	16
BTFVAWE065	179.8	141.2	140	139.5	68.7	99.7	189.0	247.0	111.6	48.3	32.4	4-18	4-19	4-19	1.357	14
BTFVAWE080	195.0	156.4	140	139.5	83.9	99.7	238.5	282.6	132.5	51.9	36.3	8-20	4-19	4-19	1.800	10
BTFVAWE100	228.1	183.0	150	152.4	103.2	99.7	239.5	319.4	155.4	54.5	44.1	8-20	8-19	8-19	2.375	8
BTFVAWE125	257.0	210.9	175	190.5	129.5	139.0	309.8	368.0	170.3	66.5	54.6	8-21.5	8-19	8-19	4.200	5
BTFVAWE150	285.4	238.5	240	241.5	151.1	140.0	309.8	400.8	187.5	73.1	56.4	8-24	8-23	8-22	4.750	4
BTFVAWE200	342.6	292.4	295	298.5	198.6	140.0	309.8	473.0	230.1	92.0	72.2	8-24	12-23	8-23	8.000	2